



KEY FEATURES


- Heavy Duty Thermoplastic Housing
- Top & Bottom Swivels
- Ergonomic Carry handle
- Spring-loaded Bumper Rubber Handle
- Side Payout
- Individually Serialised
- Internal Shock absorbing System
- Built in reserve line
- Available in 6m, 10m, 15m, 20m Variants
- Fitted with Triple acting carabiners top and bottom
- Up to 5 Years Service life

TECHNICAL INFORMATION

- Capacity - 140kg
- Max Arresting Force - 6kN
- Cable - 5.6mm Galvanized Cable
- For Overhead use only

STANDARDS

- EN360:2023
- AS/NZS 1891.3:2020



Product No.	Length	Weight	Dimension mm		
			A	B	C
SRDP06CTCT	6m	3.5kg	610	226	86
SRDP10CTCT	10m	4.4kg	610	226	86
SRDP15CTCT	15m	6.8kg	671	259	86
SRDP20CTCT	20m	9.1kg	701	292	97

ATOMIC Safety Products


Unit 8/7 Cook CT North Lakes QLD 4509

Customer Service:

Email: admin@atomicsafety.com.au

Web: atomicsafety.com.au

PROTON SELF-RETRACTING DEVICE

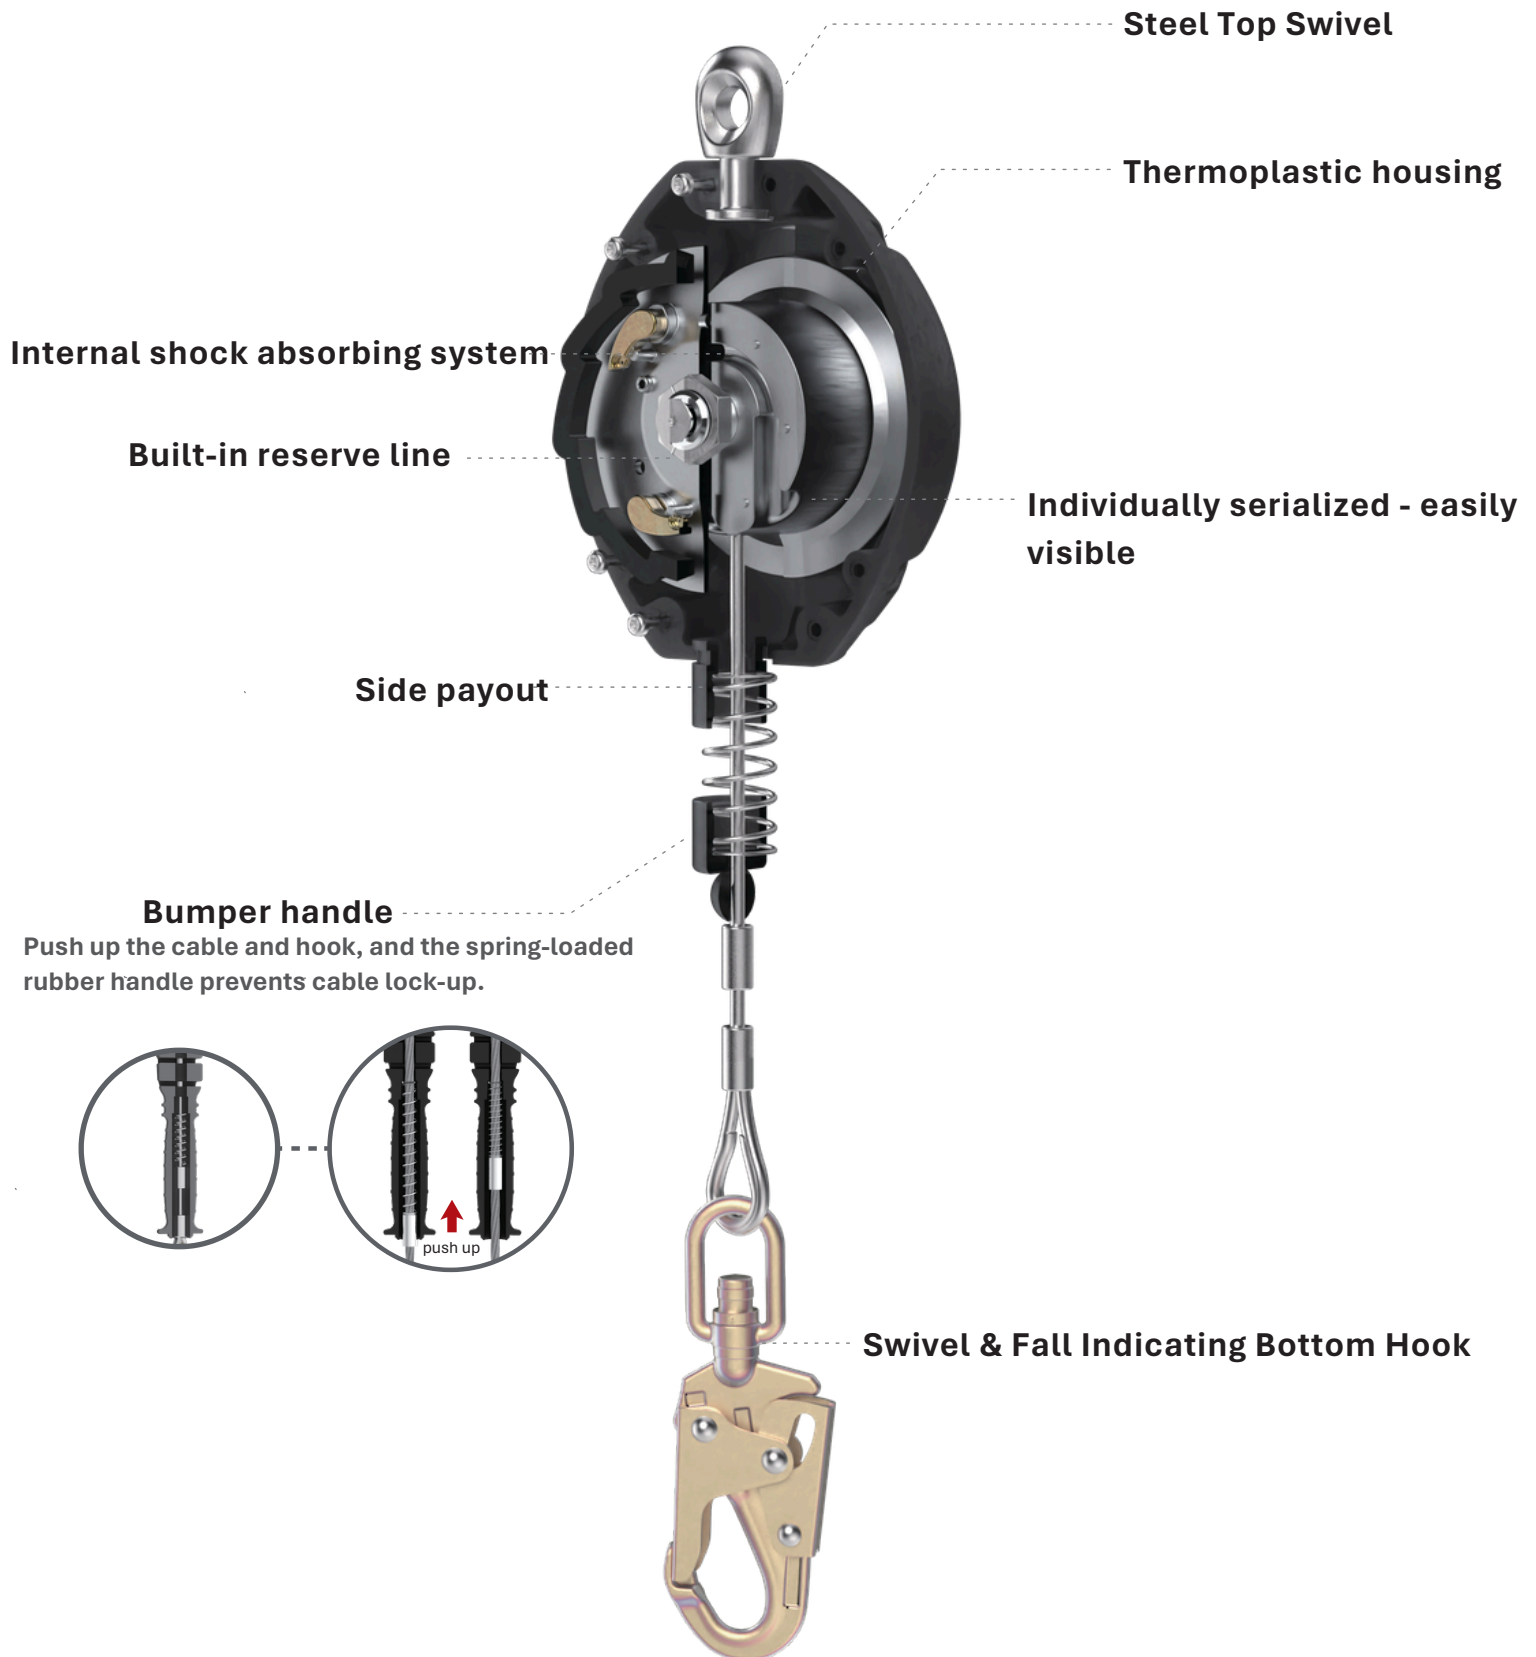

ATOMIC Safety Products

Unit 8/7 Cook CT North Lakes QLD 4509

Customer Service:

Email: admin@atomicsafety.com.au

Web: atomicsafety.com.au